

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 November 2003 (13.11.2003)

PCT

(10) International Publication Number
WO 03/094477 A1

(51) International Patent Classification⁷: **H04L 29/06**

(21) International Application Number: **PCT/IB02/02324**

(22) International Filing Date: **29 April 2002 (29.04.2002)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(71) Applicant (for all designated States except US): **NOKIA CORPORATION [FI/FI];** Keilalahdentie 4, FIN-03260 Espoo (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **VESTERINEN, Seppo [FI/FI];** Lillukkakuja 8, FIN-90460 Oulunsalo (FI).

(74) Agents: **STYLE, Kelda, Camilla, Karen et al.;** Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: INTERNET PROTOCOL BASED SYSTEM

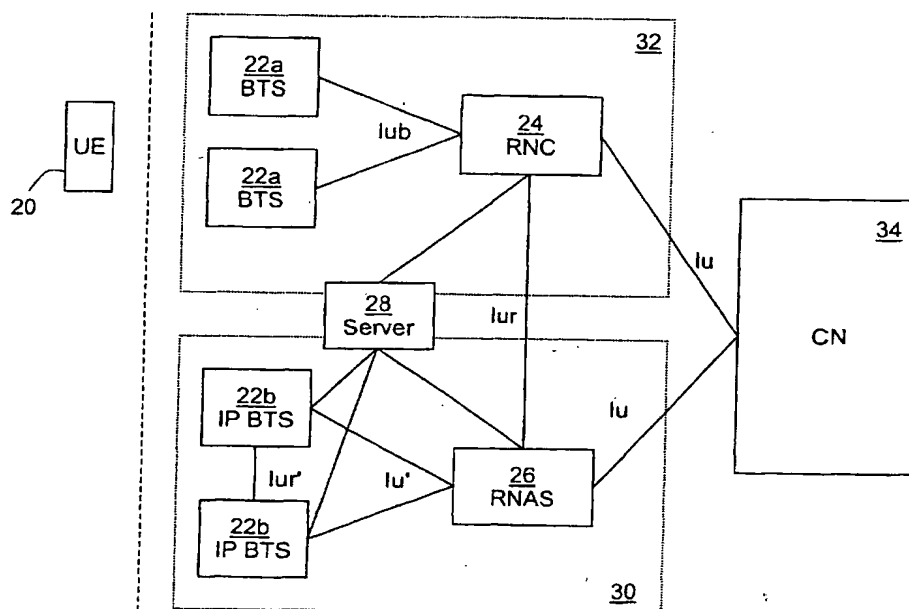

Radio interface

(57) Abstract: The invention provides an internet protocol based system comprising a plurality of entities. At least two of the entities are arranged to use SCTP for signaling therebetween. The SCTP signaling comprises connection identity information relating to a connection between at least two of said entities.